
MICROFOLD 1000 MK1 PODIUM

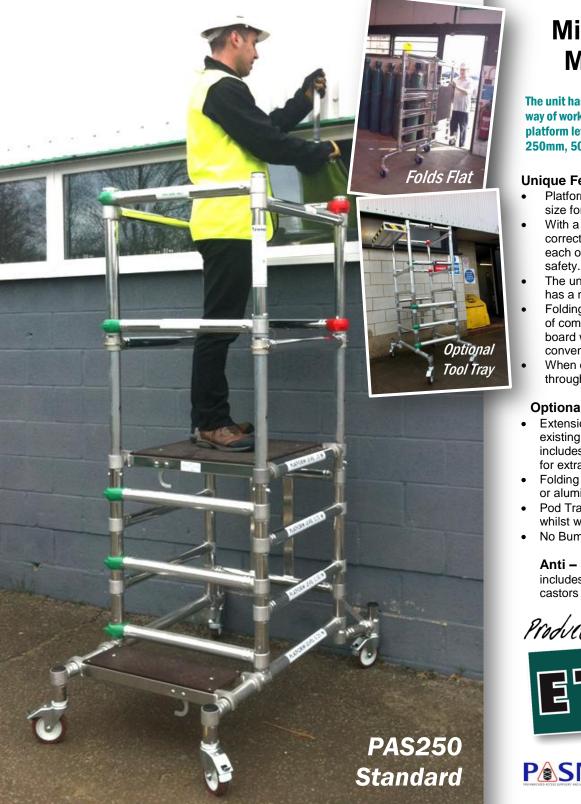

Microfold 1000 **MK1** Podium

The unit has been designed to provide a safer way of working at low levels and offers four platform levels of 250mm, 500mm, 750mm, 1m

Unique Features:

- Platform area of 600mm square, an ideal size for one man and tools.
- With a telescopic handrail section, the correct guardrail height is achieved at each of the four levels, to ensure user safetv.
- The unit is fitted with lockable castors and has a non-slip platform board.
- Folding construction ensures a minimum of components, when not in use the board will fit on to the side of the unit for convenient storage.
- When open or closed the unit will pass through doors and corridors with ease.

Optional Extra's Include:

- Extension pack that can raise the existing platform level to 1.5m, this includes the base unit and 2 stabilizers for extra stability.
- Folding Toeboard assembly, in softwood or aluminum.
- Pod Tray Tool Tray for tool storage whilst working on the platform
- No Bumps Impact Protector

Anti – Surf Option Available This includes 2 x fixed legs which replace the castors on the unit.



EuroTowersUK

PasMA Low Level Training Available

EURO TOWERS LTD

UK Manufacturer of Aluminium Access Equipment

Tel: +44 (0) 1604 644 774 | Web: www.EuroTowers.co.uk | Email: Sales@eurotowers.co.uk Euro Towers Ltd, Unit 5, Edgemead Close, Round Spinney Ind Est, Northampton, NN3 8RG



MICROFOLD 1000 MK1 PODIUM

Microfold 1000 MK1 Podium

Assembly Instructions

Ensure all parts are present and are not damaged before assembling

COMPRISING OF ...

- 4 x K548 Castors with adaptors
- 1 x MFBU Microfold base unit
- **1 x MCPP** Microfold platform
- 1 x MFGF/R Red g/rail frame
- 1 x MFGF/G Green g/rail frame
- **1 x MFSP Microfold Step Platform**

PLATFORM LEVEL 1: 0.25M

- Place the unit in position, open the green gate braces 1. and square the unit.
- Fit the step platform as shown and fit the main platform 2. on the bottom rung.
- Place unit in work position and lock all castors. 3.
- Enter platform, close the green gate braces in their 4. locations ensuring that the brace hooks are fully engaged.

PLATFORM LEVEL 2: 0.5M

- Unfold the unit, open the green gate braces and square 1. the unit.
- Fit the step platform as shown as fit the main platform on the 2^{nd} rung. 2. 3.
- Place unit in work position and lock all castors. 4 Enter platform, close green gate braces in their locations ensure that the brace hooks are fully engaged.

PLATFORM LEVEL 3: 0.75M

- Unfold the unit, open the green gate braces and square 1. the unit.
- Fit the step platform as shown and fit the main platform 2. on the 3rd rung Place unit in work position and lock in castors.
- 3.
- 4. Raise guardrail to the next pin hole 1m above the platform and engage the long pin clips.
- 5. Enter platform, close green gate braces in their locations ensuring that the brace hooks are fully engaged.

PLATFORM LEVEL 4: 1.0M

- Unfold the unit, open the green gate braces and square 1. the unit.
- Fit the step platform as shown and fit the main platform 2. on the 4th rung.
- 3. Place unit in the work position and lock all castors. Raise guardrail to the next pin hole 1m above the platform and engage long pin clips.
- Enter platform, close the green gate braces in their 5. locations ensuring that the brace hooks are fully engaged.



	Microfold 1000 MK1 Unit
Platform Height	0.25, - 1m
Safe Working Load	150Kg
Platform Dimensions	0.6m x 0.6m
Unit Dimensions	0.6m x 1.2m

General Safety Rules:

- 1. Do not use if the product is damaged or has parts missing.
- 2. Do not use on unstable ground such as loose bricks, boxes or blocks.
- 3. Before use ensure that the castors are fully fitted to the folding frame, tighten if necessary.
- Remove all personnel and materials before moving 4. the unit.
- 5. When moving the unit, apply force manually by pushing at the base.
- Do not over reach and do not move the unit by pulling 6. yourself along whilst on the platform.
- Do not gain extra height by using boxes, ladders etc 7. on the platform.
- Access to the unit is only through the green gates, 8. never through the red gates.
- Ensure that the locking hooks on gates are functioning correctly and are fully engaged.
- 10. Ensure that the castors are locked before use.
- 11. Ensure that the long pin clips are properly fitted.
- If there is an overhead hazard use head protection. 12.
- Never gain entrance to the platform by climbing over 13. the outside of the unit.
- 14 Do not over load the unit.
- 15. Do not overreach out of the unit.

MAXIMUM SAFE WORKING LOAD FOR PLATFORM / STRUCTURE: 150KG

For more information on this unit or the Microfold Extension pack, please contact us on 01604 644 774 or sales@eurotowers.co.uk

EURO TOWERS LTD

UK Manufacturer of Aluminium Access Equipment

Tel: +44 (0) 1604 644 774 | Web: www.EuroTowers.co.uk | Email: Sales@eurotowers.co.uk Euro Towers Ltd, Unit 5, Edgemead Close, Round Spinney Ind Est, Northampton, NN3 8RG











